

Individual Garage

The MINIMUM internal size is 4.8m x 2.4m


THROUGH garages-with doors back and front are strongly recommended when this can give access for additional rear cutilage parking.



Parking space in front of a garage.

Allow a minimum of 6m space for minimum working at rear, up and over door clearance at front.

This space MUST NOT lie within future highway limits.

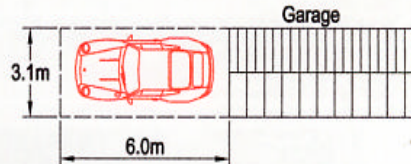


Grouped garages on sloping sites

Where garages are sited across contours they may need to be wider than normal to accommodate wider piers.

The maneuvering space in a garage forecourt will need to be wider than the minimum to accommodate a short ramp.

The length of a ramp and width of pier will depend on the slope of the forecourt.

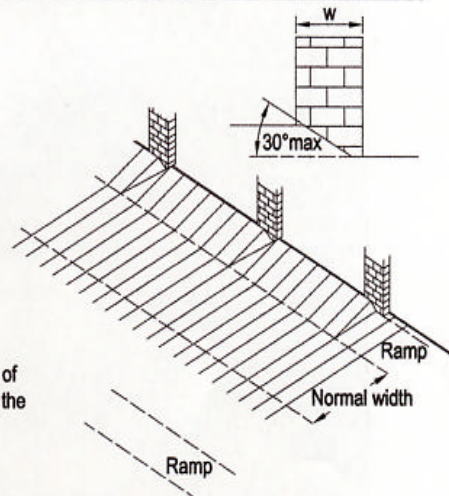

Parking space abutting turning areas

Parking bays will need to be lengthened where they abut turning areas and provided with a dropped kerb to act as a distance stop. This will enable large vehicles to turn properly. xxxroad width.

